

CP-UNC-DA41ZPL4-MD

4 MP Network IR Dome Camera - 40Mtr.

- 1/3" 4MP PS CMOS Image Sensor (0.84667 centimeters)
- Max. Outputs 4MP (2560 × 1440)@25/30 fps, and supports max. 4MP (2688 × 1520)@20 fps
- Instastream, H.265, H.264+, H.264, H.264B, MJPEG, Dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D DNR, ROI, AGC, BLC, HLC
- 2.8mm~12mm Motorized Lens
- IR Range of 40 Mtrs,
- Support Micro SD Card, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro Lite



System Overview

With features of simple installation, easy operation, and high performance-cost ratio, This Series camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Power over Ethernet

This product uses the latest PoE technology to troubleshoot the occurrence of any issues in the system making it easier to use. With the help of this technology, your camera now only consumes energy directly from the power supply and doesn't require any mid-way switches.



CP-UNC-DA41ZPL4-MD

4 MP Network IR Dome Camera - 40Mtr.

Functions

Regions of interest

Regions of Interest (ROI) is a user defined feature that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas.

True Day/Night (ICR)

When the scene is too dark, the image is captured by illuminating an infrared light through the camera onto the scene that greatly helps with making the scene visible for the lens. It delivers color images during the day and automatically switches to the monochrome feature as the scene darkens.

gCMOB/ iCMOB

Designed to allow users to access and control live streaming from CP PLUS IP Cameras, DVRs/ NVRs and Video Door Phones, the CP PLUS gCMOB/ iCMOB application offers a host of features such as Easy GUI, up to 16 live viewing splits; InstaOn cloud support; Playback; digital zoom ins; two-way talk, and more.

KVMS Pro Lite

The KVMS Pro Lite is a hybrid security management software that allows the management of various surveillance devices such as cameras, DVRs/ NVRs, encoders/ decoders, etc. It is released with the surveillance hardware and exclusively supports CP PLUS devices.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.




CP-UNC-DA41ZPL4-MD

4 MP Network IR Dome Camera - 40Mtr.

Feature	Specification
Image Sensor	1/3" 4MP PS CMOS Image Sensor (0.84667 centimeters)
Minimum Illumination	0.03 Lux @ F1.7
Effective Pixels	2688 (H) ×1520 (V)
Shutter Speed	Auto/Manual 1/3 s–1/100000 s
White Balance	Auto, Natural, Street lamp, Outdoor, Manual, Regional custom
Lens	2.8mm~12mm Motorized lens
Gain Control(AGC)	Auto/Manual
Angle of View	Horizontal: 98°–31° Vertical: 55°–18° Diagonal: 116°–36°
Video Compression	Instastream, H.265, H.264+, H.264, H.264B, MJPEG
Back Light Compensation	BLC/ HLC/ WDR(120dB)
Frame Rate	Main Stream: 4MP(2688 × 1520)@1–20 fps, (2560 × 1440)@1–25/30 fps Sub Stream: (704 × 576)@1 fps–20/25 fps, (704 × 480)@1–20/30 fps
Resolution	4MP (2688 × 1520), (2560 × 1440), 2304 × 1296 (2304 × 1296), 2MP (1920 × 1080), 1.3M (1280 × 960), 720p (1280 × 720), D1 (704 × 576/704 × 480)
Motion detection	OFF/ON (4 areas, rectangular)
Privacy Mask	4 areas
Day/Night	Auto(ICR), Color, B/W
ROI	Yes (4 areas)
Bit Rate	H.265: 12 Kbps–6144 Kbps, H.264: 32 Kbps–6144 Kbps
Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, QoS, UPnP, NTP, RTMP, Multicast, HTTPS, SFTP, 802.1x, ICMP, IGMP, ONVIF (Profile S/Profile G), CGI, P2P
Smart Detection	Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
Ethernet	RJ-45 (10/100Base-T)
IR	IR Range of 40 Mtr., Smart IR

Feature	Specification
Weatherproof Standard	IP67
Storage	Micro SD card (support max. 256 GB); NAS; FTP
Smart Phone	iPhone, iPad, Android Phone
Operating Temperature	-30°C to +55°C (-22°F to +131°F) /less than≤95%
User/Host	20 Users
Power Source	DC12V, PoE (802.3af)
Power Consumption	< 6.4W
Casing	Plastic
Dimension	98.1 mm × Φ122 mm (3.9" × Φ4.8")
Weight	0.39 kg

Dimensions (mm/inch)

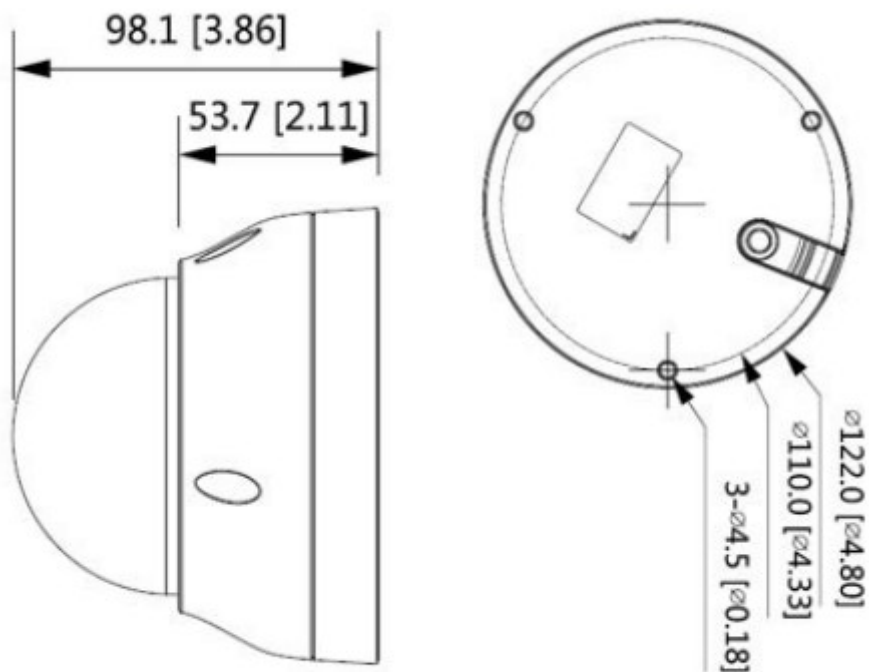

Company Name:

CP PLUS (Aditya Infotech Ltd.)
F-28 Okhla Industrial Area, Phase 1,
New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com